

Valvola - Tubo/maschio cilindrico - RPS PG



Filettatura maschio

BSPP

G 1/8

Per tubo Ø est. (mm)

6

Pressione di

utilizzo

0 a 10 bar

Temperatura

0°C a + 60°C


Materiale

Polimero e ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPP	Per tubo Ø est. (mm)
RPS PG0600	G 1/8	6
RPS PG0601	G 1/4	6
RPS PG0602	G 3/8	6
RPS PG0800	G 1/8	8
RPS PG0801	G 1/4	8

Riferimento	Filettatura maschio BSPP	Per tubo Ø est. (mm)
RPS PG0802	G 3/8	8
RPS PG1001	G 1/4	10
RPS PG1002	G 3/8	10
RPS PG1003	G 1/2	10
RPS PG1201	G 1/4	12
RPS PG1202	G 3/8	12
RPS PG1203	G 1/2	12

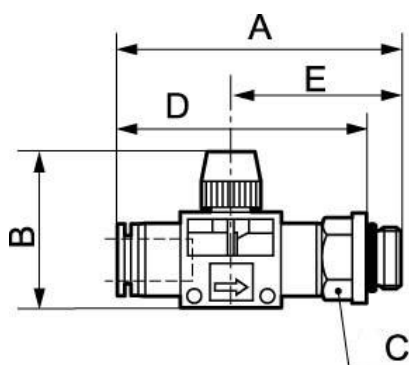

Dimensions

Riferimento	A mm	B mm	C mm	D mm	E mm
RPS PG0600	58	40.3	14	52.5	32.5
RPS PG0601	58	40.3	14	52	32.5
RPS PG0602	59.5	40.3	17	53	34
RPS PG0800	58.3	40.3	14	52.8	32.5
RPS PG0801	58.3	40.3	14	52.3	32.5
RPS PG0802	59.8	40.3	17	53.3	34
RPS PG1001	70.1	44.5	17	64.1	39
RPS PG1002	69.6	44.5	17	63.1	38.5
RPS PG1003	71.1	44.5	21	63.1	40
RPS PG1201	70.8	44.5	17	64.8	39
RPS PG1202	70.3	44.5	17	63.8	38.5
RPS PG1203	71.8	44.5	21	63.8	40