

## T laterale maschio, girevole conico - RPT AR



**Filettatura maschio**

**BSPT**

R 1/8

**Per tubo Ø est. (mm)**

4

**Pressione di**

**utilizzo**

0 a 10 bar

**Temperatura**

0°C a + 60°C


**Materiale**

Polimero e ottone nichelato

### Descrizione

| Riferimento       | Filettatura maschio BSPT | Per tubo Ø est. (mm) |
|-------------------|--------------------------|----------------------|
| <b>RPT AR0400</b> | R 1/8                    | 4                    |
| <b>RPT AR0401</b> | R 1/4                    | 4                    |
| <b>RPT AR0500</b> | R 1/8                    | 5                    |
| <b>RPT AR0501</b> | R 1/4                    | 5                    |
| <b>RPT AR0502</b> | R 3/8                    | 5                    |
| <b>RPT AR0503</b> | R 1/2                    | 5                    |
| <b>RPT AR0600</b> | R 1/8                    | 6                    |
| <b>RPT AR0601</b> | R 1/4                    | 6                    |

| Riferimento       | Filettatura maschio BSPT | Per tubo Ø est. (mm) |
|-------------------|--------------------------|----------------------|
| <b>RPT AR0602</b> | R 3/8                    | 6                    |
| <b>RPT AR0603</b> | R 1/2                    | 6                    |
| <b>RPT AR0800</b> | R 1/8                    | 8                    |
| <b>RPT AR0801</b> | R 1/4                    | 8                    |
| <b>RPT AR0802</b> | R 3/8                    | 8                    |
| <b>RPT AR0803</b> | R 1/2                    | 8                    |
| <b>RPT AR1000</b> | R 1/8                    | 10                   |
| <b>RPT AR1001</b> | R 1/4                    | 10                   |
| <b>RPT AR1002</b> | R 3/8                    | 10                   |
| <b>RPT AR1003</b> | R 1/2                    | 10                   |
| <b>RPT AR1201</b> | R 1/4                    | 12                   |
| <b>RPT AR1202</b> | R 3/8                    | 12                   |
| <b>RPT AR1203</b> | R 1/2                    | 12                   |
| <b>RPT AR1402</b> | R 3/8                    | 14                   |
| <b>RPT AR1403</b> | R 1/2                    | 14                   |
| <b>RPT AR1602</b> | R 3/8                    | 16                   |
| <b>RPT AR1603</b> | R 1/2                    | 16                   |

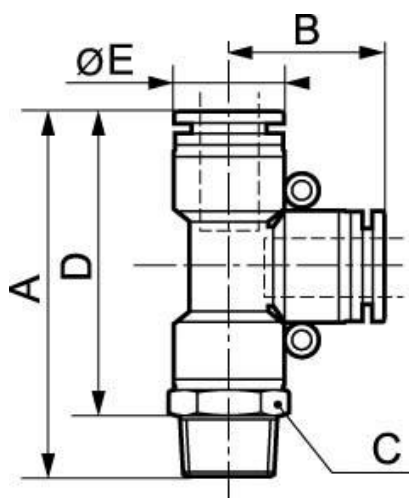

| Dimensions        |      |      |      |      |      |
|-------------------|------|------|------|------|------|
| Riferimento       | A mm | B mm | C mm | D mm | E mm |
| <b>RPT AR0400</b> | 42.5 | 17.5 | 10   | 35   | 10   |
| <b>RPT AR0401</b> | 44   | 17.5 | 14   | 35   | 10   |
| <b>RPT AR0500</b> | 48   | 20.5 | 12   | 40.5 | 12.8 |
| <b>RPT AR0501</b> | 49.5 | 20.5 | 14   | 40.5 | 12.8 |
| <b>RPT AR0502</b> | 52   | 20.5 | 17   | 41   | 12.8 |
| <b>RPT AR0503</b> | 54.5 | 20.5 | 21   | 41.5 | 12.8 |
| <b>RPT AR0600</b> | 48   | 20.5 | 12   | 40.5 | 12.8 |
| <b>RPT AR0601</b> | 49.5 | 20.5 | 14   | 40.5 | 12.8 |
| <b>RPT AR0602</b> | 52   | 20.5 | 17   | 41   | 12.8 |
| <b>RPT AR0603</b> | 54.5 | 20.5 | 21   | 41.5 | 12.8 |
| <b>RPT AR0800</b> | 52   | 22.5 | 14   | 44.5 | 13.8 |
| <b>RPT AR0801</b> | 53.5 | 22.5 | 14   | 44.5 | 13.8 |
| <b>RPT AR0802</b> | 56   | 22.5 | 17   | 45   | 13.8 |
| <b>RPT AR0803</b> | 58.5 | 22.5 | 21   | 45.5 | 13.8 |
| <b>RPT AR1000</b> | 59.5 | 26.3 | 17   | 52   | 16.8 |
| <b>RPT AR1001</b> | 61   | 26.3 | 17   | 52   | 16.8 |
| <b>RPT AR1002</b> | 63   | 26.3 | 17   | 52   | 16.8 |

| Riferimento       | A mm | B mm | C mm | D mm | E mm |
|-------------------|------|------|------|------|------|
| <b>RPT AR1003</b> | 65.5 | 26.3 | 21   | 52.5 | 16.8 |
| <b>RPT AR1201</b> | 63.3 | 27.8 | 19   | 54.3 | 19.8 |
| <b>RPT AR1202</b> | 65.8 | 27.8 | 19   | 54.8 | 19.8 |
| <b>RPT AR1203</b> | 67.8 | 27.8 | 21   | 54.8 | 19.8 |
| <b>RPT AR1402</b> | 72.2 | 31   | 22   | 61.2 | 22.7 |
| <b>RPT AR1403</b> | 74.2 | 31   | 22   | 61.2 | 22.7 |
| <b>RPT AR1602</b> | 75.3 | 32.3 | 24   | 64.3 | 23.8 |
| <b>RPT AR1603</b> | 77.3 | 32.3 | 24   | 64.3 | 23.8 |