

T laterale maschio, girevole cilindrico - RMT AG



Filettatura maschio

BSPP

G 1/8

Per tubo Ø est. (mm)

4

Pressione di utilizzo

0 a 15 bar

Temperatura

-20°C a +80°C


Materiale

Ottone nichelato

Descrizione

Riferimento	Filettatura maschio BSPP	Per tubo Ø est. (mm)
RMT AG0400	G 1/8	4
RMT AG0600	G 1/8	6
RMT AG0601	G 1/4	6
RMT AG0800	G 1/8	8
RMT AG0801	G 1/4	8
RMT AG1001	G 1/4	10

Riferimento	Filettatura maschio BSPP	Per tubo Ø est. (mm)
RMT AG1002	G 3/8	10
RMT AG1202	G 3/8	12
RMT AG1203	G 1/2	12

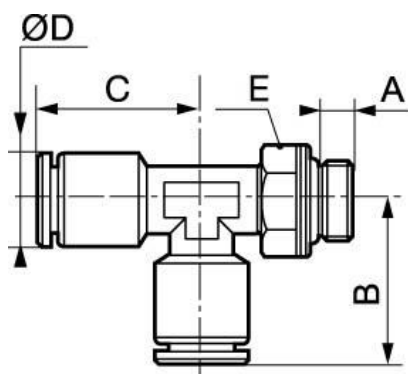

Dimensions

Riferimento	A mm	B mm	C mm	D mm	E mm
RMT AG0400	6	22.5	22.5	9.5	15
RMT AG0600	6	24	24	11.6	13
RMT AG0601	8	25	26	11.6	16
RMT AG0800	6	26	26	13.5	13
RMT AG0801	8	26	26	13.5	16
RMT AG1001	8	30.5	30.5	15.6	16
RMT AG1002	9	30.5	30.5	15.6	19
RMT AG1202	9	33	33	17.8	19
RMT AG1203	11	34.5	34.5	19	22