

## T al centro maschio, girevole conico - RMT CR



**Filettatura maschio**

**BSPT**

R 1/8

**Per tubo Ø est. (mm)**

4

**Pressione di**

**utilizzo**

0 a 15 bar

**Temperatura**

-20°C a +80°C


**Materiale**

Ottone nichelato

### Descrizione

| Riferimento       | Filettatura maschio BSPT | Per tubo Ø est. (mm) |
|-------------------|--------------------------|----------------------|
| <b>RMT CR0400</b> | R 1/8                    | 4                    |
| <b>RMT CR0401</b> | R 1/4                    | 4                    |
| <b>RMT CR0600</b> | R 1/8                    | 6                    |
| <b>RMT CR0601</b> | R 1/4                    | 6                    |
| <b>RMT CR0800</b> | R 1/8                    | 8                    |
| <b>RMT CR0801</b> | R 1/4                    | 8                    |

| Riferimento       | Filettatura maschio BSPT | Per tubo Ø est. (mm) |
|-------------------|--------------------------|----------------------|
| <b>RMT CR0802</b> | R 3/8                    | 8                    |
| <b>RMT CR1001</b> | R 1/4                    | 10                   |
| <b>RMT CR1002</b> | R 3/8                    | 10                   |

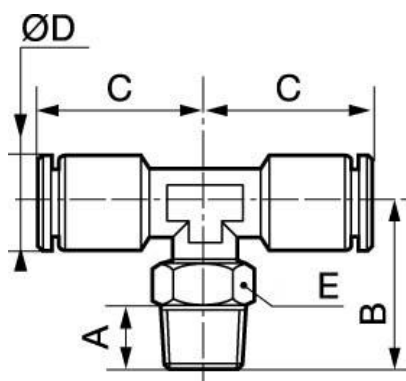

## Dimensions

| Riferimento       | A mm | B mm | C mm | D mm | E mm |
|-------------------|------|------|------|------|------|
| <b>RMT CR0400</b> | 8    | 21.5 | 21   | 9.8  | 12   |
| <b>RMT CR0401</b> | 11   | 25   | 21   | 9.8  | 16   |
| <b>RMT CR0600</b> | 8    | 21.5 | 24   | 11.6 | 12   |
| <b>RMT CR0601</b> | 11   | 26   | 26   | 11.6 | 16   |
| <b>RMT CR0800</b> | 8    | 23   | 26   | 13.5 | 12   |
| <b>RMT CR0801</b> | 11   | 26   | 26   | 13.5 | 16   |
| <b>RMT CR0802</b> | 12   | 32   | 26   | 14   | 19   |
| <b>RMT CR1001</b> | 11   | 28.5 | 30.5 | 15.6 | 16   |
| <b>RMT CR1002</b> | 11   | 30.5 | 30.5 | 15.6 | 19   |